

# H&S

## HEAVY DUTY MANURE SPREADERS





# MODEL 235 AND 270




Model 235 - 235 Bushel, Struck level 143 cu. ft.

## H&S RUC DEPENDA



The rear pan is optional on all models.

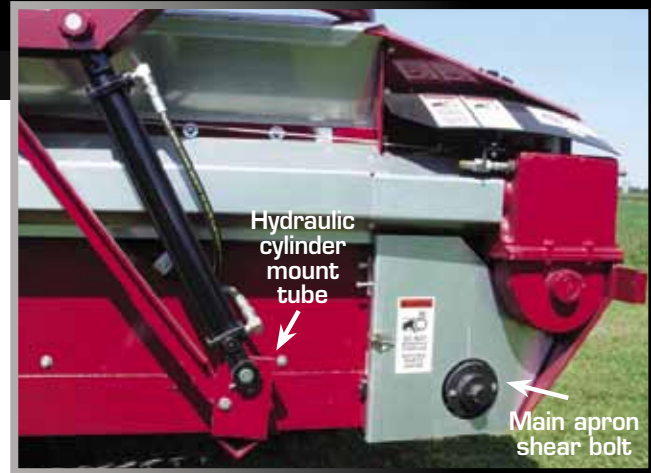

Hydraulic  
cylinder  
mount  
tube

Main apron  
shear bolt

### UNLOADING SPEED FOR 235 & 270 SPREADERS: (2 speed gear box)

**High speed: PTO speed 540 rpm's  
8'9" per minute**

**Low speed: PTO speed 540 rpm's  
4'9" per minute**

The drive for the 235 and 270 spreaders utilize the patented H&S 2 speed gear box. Shifting is all done in the enclosed two speed/beater shutoff gear box. The sturdy hydraulic cylinder mount tube extends all the way through the frame to the other side.



The side flares on all H&S "Heavy Duty" manure spreaders are made of 10 gauge G210 culvert grade galvanized steel.

**Model 207 -  
270 Bushel,  
Struck level 167 cu. ft.**