

BUSH HOG®

Performance You Can Count On™

BH20 Series

**NEW
FOR 2013!**



Rotary Cutter

Bush Hog's Famous Reliability In A Medium-Duty Cutter

Bush Hog's BH20 Series rotary cutters bring our famous reliability to brush cutting and weed and grass mowing for farms, estates and highway right-of-way mowing. Built with Bush Hog's tough features, this series delivers superior performance the first day on the job and for years to come.

7 Bush Hog® Features That Deliver Superior Performance!

- 1. EZ Clean Sloped 10 Gauge Decks** built to eliminate trash build up and water traps.
- 2. Solid 1/4 inch Sidebands** are continuously welded. Formed of 1/4 inch thick steel, they are 12 1/2 inches deep and able to handle large volumes of material.
- 3. Strong Replaceable Full Length 1/4 Inch Skids** run one-half the length of the deck to protect side bands and add strength that resists bending.
- 4. Tried and True Bush Hog Gearboxes** that survived our impact test, unbalanced test, and durability test. The splined output shafts with tapered roller bearings resist thrust and side loads as the pan pushes cutter up or to the side of large obstacles like rocks or stumps.
- 5. Durable Powder Coat Paint** in colors that match today's tractors is baked on to resist rust and nicks through years of rugged work.
- 6. 5 Year Gearbox Limited Warranty.** Each new BH20 Series Cutter comes with a five year limited gearbox warranty.
- 7. Tough Tail Wheel Beam** has 3/16" wall and is clamped between two heavy steel plates for a secure fit to resist side loads during turns. Dual tail wheels available on BH27.

Model	Cutting Width	Minimum Tractor HP
BH25	5 feet	35 PTO
BH26	6 feet	45 PTO
BH27	7 feet	55 PTO

BH20 Series Rotary Cutters




Quick Detach Gearbox Shield



Solid Deck Reinforcements.


Decks are reinforced with internal 7-gauge steel strongbacks that run the full length of the deck, tying together the entire structure with the gearbox stand. Bush Hog® blade pans are round to allow the mower to float over field obstructions.

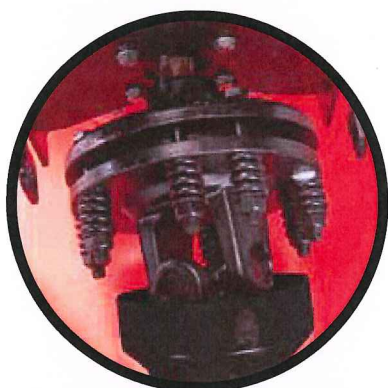

Adjustable Slip Clutches are standard equipment.



Floating Hitch for unlevel terrain

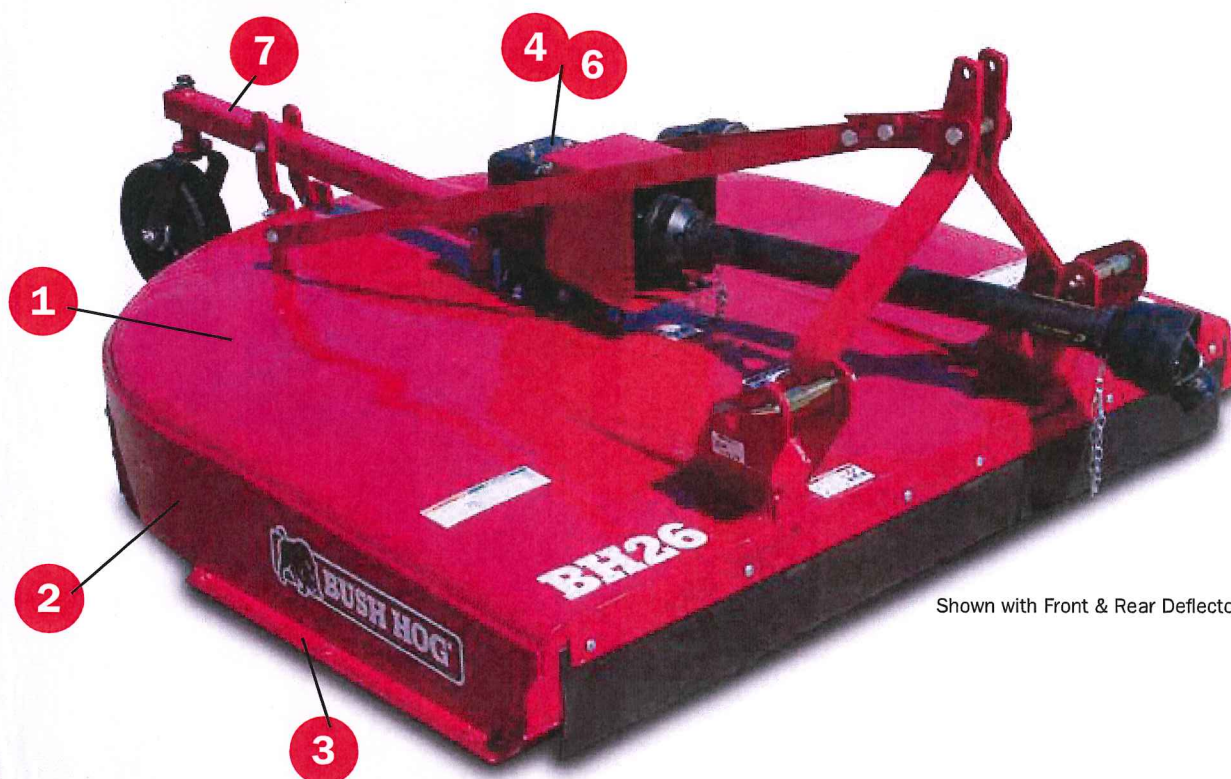

Shown with Front & Rear Deflector Selection

Bush Hog®

BH20 Series Rotary Cutters

FEATURES:

EZ Clean Sloped 10-Gauge Decks

1/4-Inch Sidebands

5-Year Gearbox Limited Warranty

Replaceable Full Length Skids

130 HP Bush Hog® Gearbox

Powder Coat Paint

Durable Tailwheel Beam



BH27 with Dual Tail Wheels Shown with Chain Shielding Selection

MODELS	BH25	BH26	BH27
Cutting Width	5 feet	6 feet	7 feet
Cutting Capacity	3 inch diameter	3 inch diameter	3 inch diameter
Cutting Height	11/2 to 101/2 inches	11/2 to 101/2 inches	11/2 to 101/2 inches
Dimensions (transport width x length)	5 ft 6 inches x 8 ft 8 inches	6 ft 6 inches x 9 ft 8 inches	7 ft 6 inches x 10 ft 8 inches (single wheels) 10 ft 1 inch (double wheels)
Type Hitch	3 Point Cat. I, Cat. II Standard & QH	3 Point Cat. I, Cat. II Standard & QH	3 Point Cat. I, Cat. II Standard & QH
Deck Thickness	10 gauge	10 gauge	10 gauge
Sidebands	1/4 x 121/2 inches	1/4 x 121/2 inches	1/4 x 121/2 inches
Driveshaft	ASAE Category 4	ASAE Category 4	ASAE Category 4
Gearbox	130 HP	130 HP	130 HP
Tractor PTO Speed	540 RPM	540 RPM	540 RPM
Driveline Protection	Slip Clutch Standard	Slip Clutch Standard	Slip Clutch Standard
Blade Holder(s)	Round	Round	Round
Blades	1/2 x 4 inch uplift	1/2 x 4 inch uplift	1/2 x 4 inch uplift
Blade Tip Speed	14,600 FPM	15,000 FPM	14,450 FPM
Tires	Single Laminated	Single Laminated	Single or Dual Laminated
Minimum Tractor HP	35 PTO	45 PTO	55 PTO
Safety Shielding	Front and Rear Deflectors or Front and Rear Chains		
Approximate Weight	906 lbs	1095 lbs	1328 lbs
Warranty	1 year limited warranty with a 5 year gearbox limited warranty		

FEATURES

Available in major tractor colors

Warning: For non-agricultural use, OSHA, ASAE, SAE, and ANSI standards require the use of chain guards or other protective guards at all times. Bush Hog strongly recommends the use of such guards for agricultural uses as well, to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by or from contact with the cutting blades.



BUSH HOG®
Performance You Can Count On™

www.bushhog.com

Bush Hog®, Inc.
2501 Griffin Ave., Selma, AL 36703
(334) 874-2700

Specifications subject to change.
© March 2013 Bush Hog®, Inc.